

V-TUF



SPRAYEX30XR

PORTABLE SPRAY EXTRACTION
CARPET & UPHOLSTERY CLEANER

OPERATOR MANUAL



Please read this manual before using the SPRAYEX30XR

All Errors & Omissions Excused – Specification May Change Without Notice – Please Refer To www.v-tuf.co.uk For the Latest Version

SPRAYEX30XR


The Sprayex30XR is the smallest self-contained machine with a rotating brush, designed for professional cleaning of small carpet and hard floor areas. Compact, robust, and highly effective, it is ideal for spaces up to 100 m².

Despite its small size, the Sprayex30XR is built for professional use and is suitable for demanding applications such as rental services or use by cleaning companies. Its high-waterlift vacuum system ensures maximum dirt recovery from carpets while significantly reducing drying times.

The Sprayex30XR is supplied with a standard wand for carpets and hard floors, as well as a hand tool for cleaning upholstery and car interiors.

MAIN APPLICATIONS:

Cleaning companies, hotels, restaurants, clubs, pubs, offices, banks, shops, rental companies, private houses, carpet shops, trains, buses, planes, cinemas, theaters, ferry boats, ships, hospitals, nursing homes, fitness centers, schools, universities.

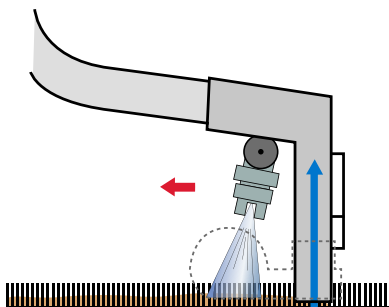


Injection-extraction cleaning



Carpet cleaning



Hard floor cleaning

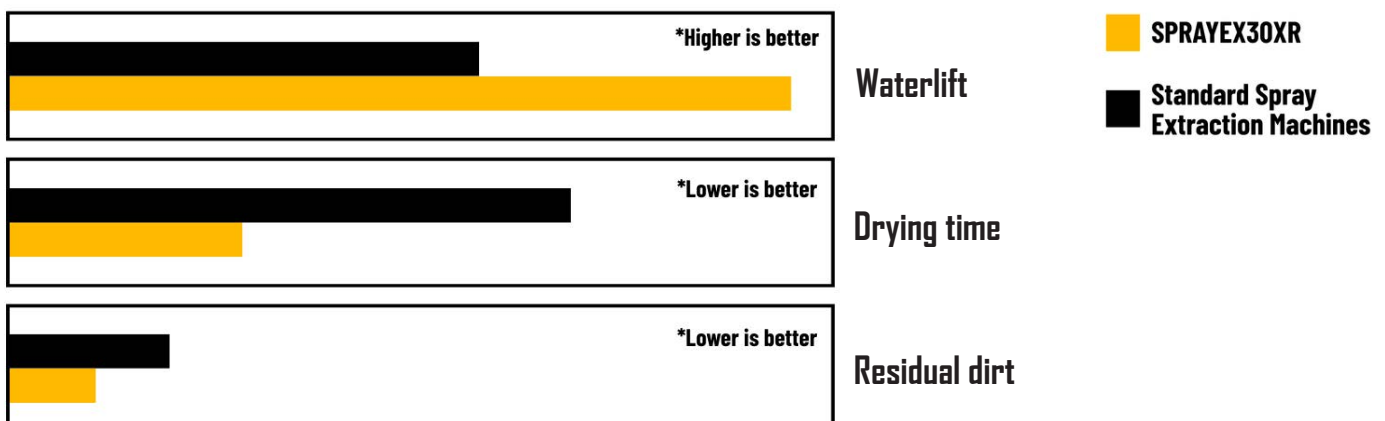

ADVANTAGES OF SPRAYEX30XR:

- 1) Compact yet spacious – Small in size compared to its tank capacity, and easy to transport, even in a small car.
- 2) High-waterlift technology – Ensures superior dirt removal and ultra-fast drying times; carpets can be dry in as little as 1 hour.
- 3) Versatile cleaning – Clean both carpets and hard floors with the same tool. Switching between surfaces is quick and simple with a lever.
- 4) S-shaped tool – Designed for easy cleaning under tables, desks, and other furniture.
- 5) Durable vacuum head – Made from die-cast aluminium, ensuring strength and longevity.
- 6) Optimised head profile – Special design reduces drying time further.
- 7) Comfortable grip – Plastic and rubber handles prevent cold hands during use.
- 8) Adjustable handle – Height can be set for ergonomic operation, allowing easy lifting of the tool and efficient downward pressure with minimal effort.
- 9) Reliable spraying valve – Built for durability to prevent breakage.
- 10) Stainless steel tubes – Strong, rustproof, and built to last the lifetime of the machine.
- 11) Quick-disconnect spray nozzle – Can be removed by hand without tools for easy cleaning and maintenance.

OTHER TECHNICAL ADVANTAGES OF SPRAYEX30XR:



- 1) High density, durable polyethylene tanks - made to last.
- 2) Transparent unbreakable cover, which allows to see the dirty water while in use.
- 3) Recovery tank with an integrated handle. The tank can be easily detached from the machine body, in order to make tank emptying easier, and simplify cleaning.
- 4) The filter of the vacuum motor is easily removable for cleaning.
- 5) The gaskets can easily be replaced by hand since they are not glued. Easy to clean and change.
- 6) Strong, sturdy wheels, in anti mark rubber.
- 7) Brass quick-disconnect couplings, for strength and reliability.
- 8) Water pump with bypass, which allows an automatic regulation of the optimal water flow according to the tool used. Moreover, the bypass device makes the pump more reliable and avoids problems over time.
- 9) Pump built to SPRAYEX30XR specifications, for a longer life.
- 10) Vacuum motor with thermal protection to prevent overload.
- 11) Vacuum motor treated with rust protection.
- 12) Both motor and pump can work continuously.
- 13) Modular design that makes the maintenance easier. Parts can be replaced with needing a new machine.

TECHNICAL DATA

ITEM	SPRAYEX30XR
Approximate performance (basic machine)*:	25-45 m ² /h
Approximate performance (professional SET)*:	50-100 m ² /h
Recovery tank capacity	14 liters
Solution tank capacity	14 liters
Vacuum motor:	2 stages – High Waterlift
Power	1500 W
Max. waterlift (mm H ₂ O)	3000 mm H ₂ O
Max. air flow (l/sec.)	50 l/sec
Pump with bypass:	vibrating
Power	70 W
Max pressure	4 bar
Max. water flow	1,5 l/min
Cleaning width (carpet/hard floor)	270/290 mm
Number of nozzles	1
Brush	Optional
Cable length	10 m
Hoses length	2,5 m
Weight (machine body)	13 kg
Weight (packaged machine)	19 kg
Dimensions	30 x 42 x 53 cm
Package dimensions	34 x 53 x 72 cm
Units/pallet	15 pcs / pallet (88x120x228h)
Standard color	Black
Tank construction	High density polyethylene
Sound pressure level (3m/1m - ISO3744)	69 dB(A) / 75 dB(A)
Power supply	Cable - 220-240V 50-60Hz
	(other voltages on request)

*The effective performance depends on the type of cleaning required:
restorative deep cleaning - maintenance cleaning.

INCLUDED ACCESSORIES

	VTVS7015	Vacuum and solution hoses, 2.5 m Ø 32 mm. with metal couplings.	
	VTVS7019	Wand, 270 mm wide, with aluminum head, 1 quick disconnect spray-nozzle, stainless-steel tubes, handle.	



www.V-TUF.COM